

UDC 539.3

EVALUATION ON STRESS DISTRIBUTION, DEFORMATION RATE IN EMBANKMENT AND SOFT SOIL REINFORCED CONCRETE PILE COMBINED GEOTEXTILE BELOW THE EMBANKMENTS IN GEOLOGICAL CONDITIONS MEKONG DELTA

Nguyen Anh Tuan¹,
PhD

Nguyen Tuan Phuong²,
PhD

¹*Hochiminh City University of Transport,
No. 2, D3 St., Ward 25, Binh Thanh Dist., Hochiminh City, Vietnam*

²*Hochiminh City University of Technology,
No. 268, Ly Thuong Kiet St., Dist. 10, Hochiminh City, Vietnam*

The main content of the paper is evaluation stress distribution, deformation rate in embankment and soft soil reinforced concrete pile combined geotextile below the embankments in geological conditions in Mekong delta by finite element method to Geotechnique-designer have to notice the correlation of rational pile-distance and embankment-depth when design weak foundation.

Keywords: Geosynthetic reinforced pile, soft soil, pile embankment, foundation, FEM.

1. Introduction

With the rapid growth of the economy and the trend of industrialization and modernization of the country, the demand of developing buildings, factories and other infrastructures in Vietnam increases, especially in the Mekong Delta area. Because of the geological structure property of Mekong Delta is mainly soft soil, the foundation depth can vary from 30 to 40m. To meet the demand of infrastructure development, there some studies and researches done recently on this geological structure.

The divergent subsidence due to causeway, path way to the bridge, storage has caused difficulty for the transportation and facility in some areas in Hochiminh city. For instance, according to Hochiminh city Transportation Department, the subsidence on Nguyen Huu Canh street varies from 0.5 to 1m. There are some proposal solutions to solve this issue such as concrete piles, sand piles, reinforced concrete, soil&cement mixture to reduce load, etc... These solutions takes a lot of time and are not efficient. Recent years, there is a solution for the foundation called "The embankment on the pile combined with geotextile". Hopefully this solution will solve the issue.

The evaluation and analysis on stress distribution, ground deformation and reinforced concrete and geotextile treatment on soft soil is extremely essential to find the new solution to improve the quality of foundation in Mekong Delta area.

2. Theoretical basis

2.1. Theory of soil arching

According Terzaghi (1943) arching effects have been described. Arching effects base on his experiment on the trap-door effects as shown in Fig. 1.

Stress Distribution Equation:

$$(\sigma_z + d\sigma_z)^* S - \sigma_z^* S + 2\tau_{xz} dz - dG = 0. \tag{1}$$

With σ_z is vertical effective Stress (Z direction), τ_{xz} is shear stress on xz plane, S is width of trap-door, G is weight of soil on trap-door, γ is the soil unit weight.

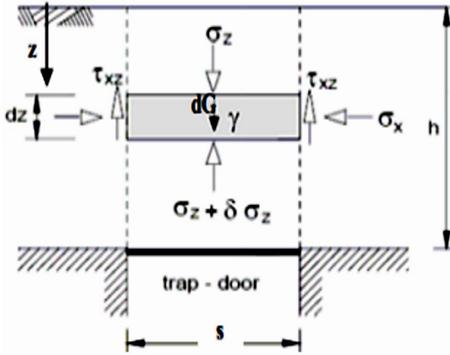


Fig. 1. Description of soil Arching analysis with Terzaghi's method

The equivalent equation:

$$d\sigma_z^* S = \gamma^* S dz - 2\tau_{xz} dz. \tag{2}$$

According to Mohr-Coulomb, the Shear Stress at failure can be expressed as:

$$\tau_{xz} = C' + \sigma_x \tan \phi'. \tag{3}$$

With C' and ϕ' are the effective cohesion and friction angle of the soil. The effective horizontal stress as a function of vertical effective stress is

$$\sigma_x = \sigma_z^* K, \text{ Terzaghi determined}$$

that $K=1$ based on his experimental results.

The equation is written as:

$$d\sigma_z^* S = \gamma^* S dz - 2(C' + \sigma_z K \tan \phi') dz. \tag{4}$$

Dividing both side of Equation (4) with σ_z and s :

$$\left(\frac{d\sigma_z}{\sigma_z} \right) = \frac{\gamma}{\sigma_z} dz - \frac{2C'}{s^* \sigma_z} dz - \frac{2K^* \tan \phi}{s} dz. \tag{5}$$

The solution for the differential equation is as follows

$$\sigma_z = \frac{S^* (\gamma - 2C'/S)}{2^* K^* \tan \phi'} \left\{ 1 - e^{-2K \tan \phi' \frac{z}{s}} \right\} + p^* e^{-2K \tan \phi' \frac{z}{s}}. \tag{6}$$

According to the result found by Terzaghi, $K=1$. Solve equation (6) gives an exponentially increasing vertical effective stress within the embankment fill between the two rigid foundations. Comparison between effective vertical stress distribution with the linearly increasing geostatic vertical stress is shown in Fig 2. Due to arching, the vertical stress acting on the ground surface below the embankment is much lower than the geostatic vertical stress.

Arching is defined by Mc. Nulty (1965) as “The ability of a material to transfer from one location to another in response to a relative displacement between the location. A system of shear stresses is the mechanism by which the loads are transfer”.

The Nordic Guiline method helps analyze arching in soil is suggested by Carlsson (1987), this method shows the angle of arching is 30 degrees refer to Fig. 5.

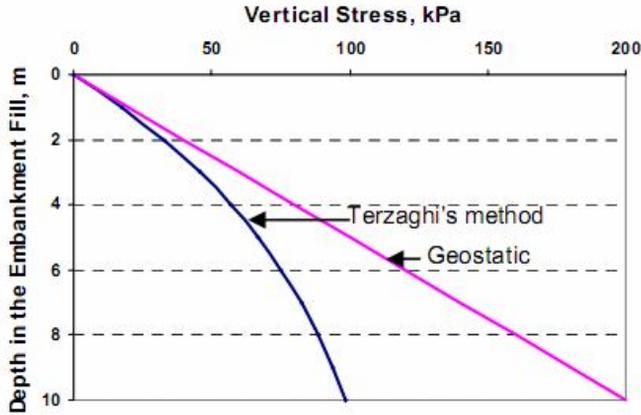


Fig. 2. Typical vertical stress distribution of embankment fill between trap-door of Terzaghi

Weight of the soil is calculated in 2D as below:

$$W = \frac{(b-a)^2}{4 \tan 15^\circ} \gamma, \tag{7}$$

with a is the width of the pile, b is the distance between the centre of 2 piles, γ is unit weight of the embankment.

Svant et al. (2000) suggested the soil weight formula in 3D

$$W = \frac{\gamma}{2a} \left\{ b^2 H - \frac{1}{6 \tan \beta} \left[(a + H \tan \beta)^3 - a^3 \right] \right\}. \tag{8}$$

With a is the width of the pile, b is the distance between the centre of 2 piles, γ is the soil unit weight, H is the height of soil layer.

Development by Jones et al. (1990) based on the past study by Marston and Anderson (1913) about the peak of the spherical dome between piles.

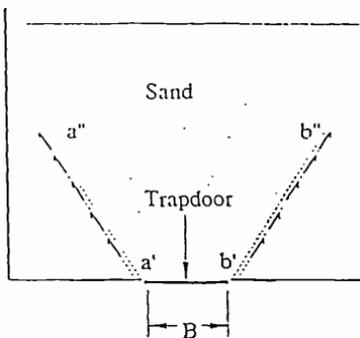


Fig. 3. The shear stress path when trap-door min displacement of Terzaghi

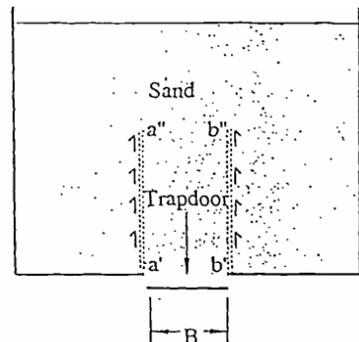


Fig. 4. The shear stress path when trap - door max displacement of Terzaghi

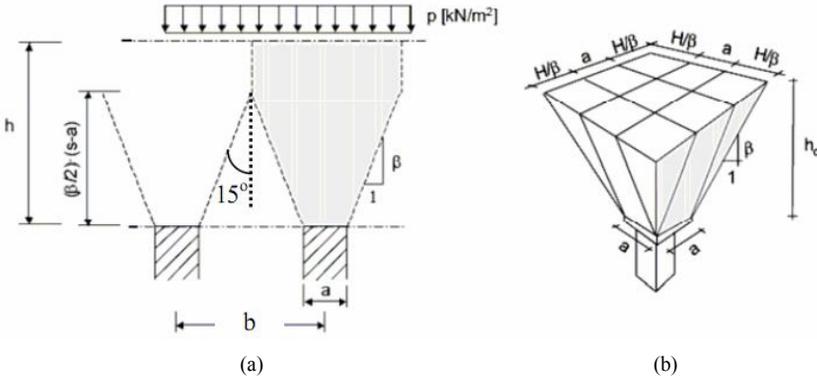


Fig. 5. Soil wedge model (a) 2D; (b) 3D defined by Carlsson

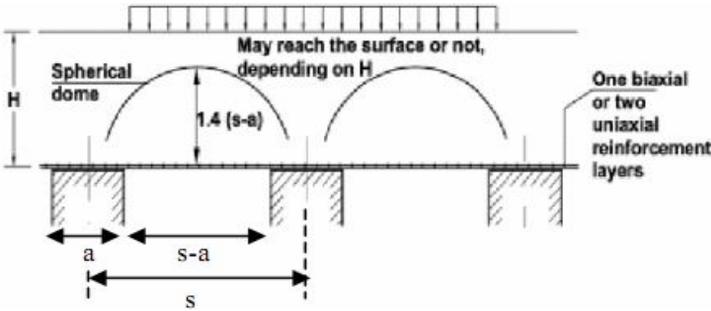


Fig. 6. Hemispheric in BS 8006

Analyze the spherical dome based on the ratio between pressure on the pile and vertical stress on the soft soil layer, P'_c / σ_v

$$P'_c = \delta'_v \left[\frac{C_c a}{H} \right]^2 \tag{9}$$

With: C_c is soil arching coefficient ($C_c = 1.95(H/a) - 0.18$ for end-bearing pile, $C_c = 1.5(H/a) - 0.07$ for friction and other pile), a is the size of the pile caps, H is the height of the embankment.

2.2. Load Transfer

McNulty (1965) and Kempton (1998) The ratio of the vertical stress on top of the cap:

$$\rho = \frac{P_b}{\gamma H + q_0} \tag{10}$$

Where: p_p is average vertical pressure above geosynthetic, q_0 is uniform surcharge on the embankment, T is tension on geotextile, $\rho = 0$: Represents the Complete soil arching / $\rho = 1$: Represents no soil arching, γ is the soil unit weight.

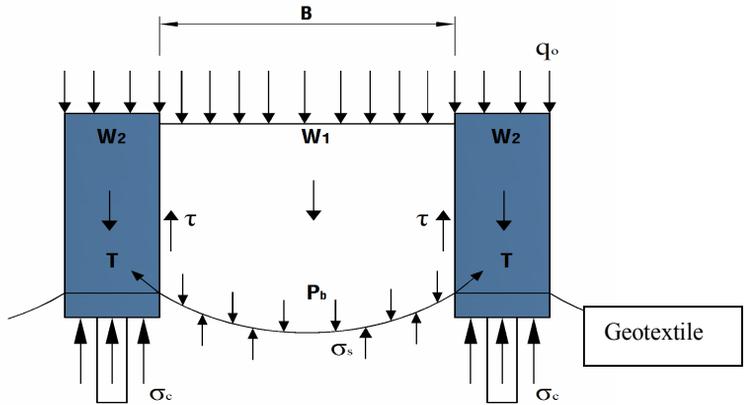


Fig. 7. Load transfer (cited in Li, 2002)

Han (2003) The ratio of the vertical stress on top of the cap:

$$n = \frac{\sigma_c}{\sigma_s} \tag{11}$$

With σ_c is vertical stress on pile, σ_s is vertical stress between piles.

Schmidt (2004) The ratio of the vertical stress on top of the cap:

$$LKF = \frac{Q}{Q_s} = \frac{\sigma_c^* A_c}{\gamma^* H^* A_c} \tag{12}$$

Γ is the soil unit weight, H is height of embankment, A_c is Cross sectional area of pile.

2.3. Factor that determines arching

Ratio that determines arching

CSR is the column stress ratio

SRR is the stress reduction ratio

N is the ratio of the vertical stress on top of the cap and E The piled embankment efficacy.

$$CSR = \frac{\sigma_c}{\sigma} = \frac{\sigma_c}{(\gamma H + q)}, \tag{13}$$

$$SRR = \frac{\sigma_s}{\sigma} = \frac{\sigma_s}{(\gamma H + q)}, \tag{14}$$

$$n = \frac{\sigma_c}{\sigma_s}, \tag{15}$$

$$E = \frac{\sigma_c \times a_s}{\sigma} \tag{16}$$

With: γ is the soil unit weight, H is height of soil layer, q is surcharge load,

$$a_s = \frac{A_c}{A_c + A_s},$$

A_c is pile cross sectional area, A_s is area of the soil associated with the column.

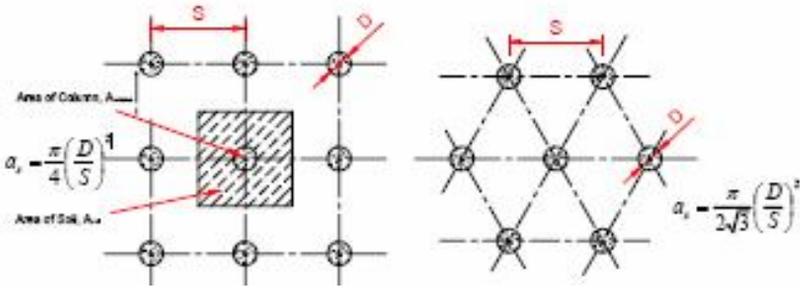


Fig. 8. Area replacement ratio

According to BS8006:1995 and some researchers, SRR is calculated as Table 1.

Table 1

The stress reduction ratio

No.	The stress reduction ratio		No. Equa
1	BS 8006 1995	$SRR = \frac{2 * S * (\gamma H + q)(S - a)}{(S^2 - a^2)^2 * \gamma H} * \left[S^2 - a^2 \left(\frac{P'_c}{\gamma H} \right) \right]$ With $H \leq 1.4(S - a)$ $SRR = \frac{2.8 * S}{(S + a)^2 * H} * \left[S^2 - a^2 \left(\frac{P'_c}{\gamma H} \right) \right]$ With $H > 1.4(S - a)$ With $\frac{P'_c}{\gamma H} = \left(\frac{C_c a}{H} \right)^2$	(17) (18) (19)
2	Terzaghi	$SRR = \frac{(S^2 - a^2)}{4 * H * a * K * \tan \phi} \left\{ 1 - e^{-\frac{4HaK \tan \phi}{s^2 - a^2}} \right\}$	(20)
3	Randolph 1988	$SRR = \frac{1}{\left[\frac{2K_p}{K_p + 1} \right] \left[\left(1 - \frac{a}{s} \right)^{(1 - K_p)} - \left(1 - \frac{a}{s} \right) \left(1 + \frac{a}{s} K_p \right) \right] + \left(1 - \frac{a^2}{s^2} \right)}$	(21)
4	Guido	$SRR = \frac{(s - a)}{3\sqrt{2} * H}$	(22)
5	Low 1994	$SRR = \frac{(K_p - 1)(1 - \delta)S}{2H * (K_p - 2)} + (1 - \delta)^{(K_p - 1)} \left[1 - \frac{S}{2H} - \frac{S}{2H(K_p - 2)} \right]$	(23)
6	Carlsson	$SRR = \frac{s - a}{4.H. \tan 15^\circ}$	(24)
7	Kivilo 1998	$CSR = \frac{1}{a_s + \frac{E_{soil}}{E_{col}}(1 - a_s)}$ $SRR = \frac{E_{soil}}{E_{col} a_s + E_{soil}(1 - a_s)}$	(25) (26)

In which: H is height of the embankment, q is external load, s is distance between pile center, a is Area replacement ratio, C_c is arching coefficient ($C_c = 1.95(H/a) - 0.18$ for end-bearing pile, $C_c = 1.5(H/a) - 0.07$ for friction and other pile), β' is angle of friction of the embankment fill, K is coefficient of later earth pressure ($K = 1$)

$$K = \frac{1 + \sin \varphi}{1 - \sin \varphi}$$

is Rankine coefficient of passive earth pressure, E_{col} is Modulus of elasticity of the column, E_{soil} is Modulus of elasticity of the unstabilized soil surrounding the column.

3. The embankment on the pile combined with geotextile

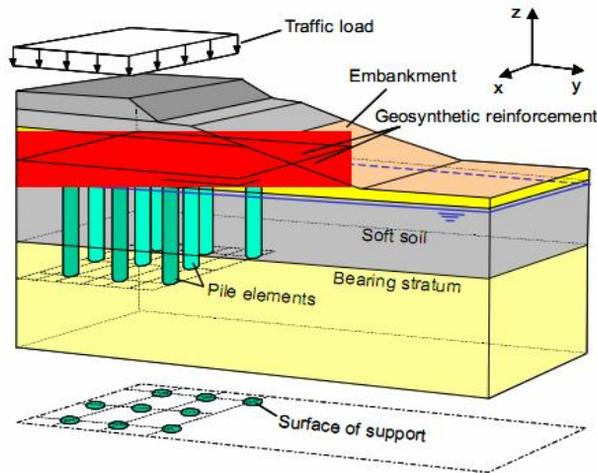


Fig. 9. Geosynthetic reinforced pile supported embankment [4],[5]

Arching in embankment.

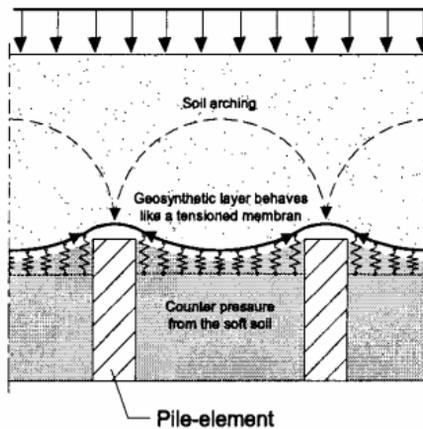


Fig. 10. Arching in embankment [4], [5]

3.1. Geosynthetic reinforcement

3.1.1. BS 8006 (1995)

One of the formulas to calculate the tension force in the geosynthetic based on the BS 8006 is as follows.

$$T_{rp} = \frac{W_T(s-a)}{2a} \sqrt{1 + \frac{1}{6\varepsilon}}, \quad (27)$$

where T_{rp} is the tensile force per meter geosynthetics, W_T is distributed vertical load acting on the geosynthetic between the piles, ε is the strain in the geosynthetics (%), a is the pile cap size and s is the center-to-center spacing.

3.1.2. Zaeske (2001) and Kempfer (2002)

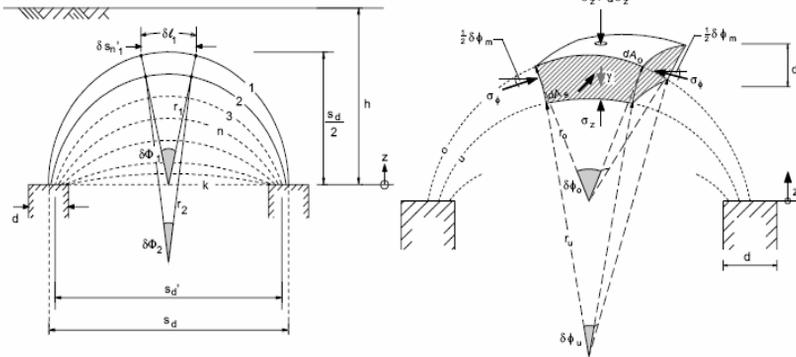


Fig 11. Multi arching model [2]

The equation is developed:

$$-\sigma_z dA_u + (\sigma_z + d\sigma_z) dA_0 - 4\sigma_\phi dA_s \sin\left(\frac{\delta\phi_m}{2}\right) + \gamma dV = 0. \quad (28)$$

Where:

$$dA_u = (r\delta\phi)^2, \quad (29)$$

$$dA_0 = (r+dr)^2 \cdot (\delta\phi + d\delta\phi)^2 = 2d\delta\phi \cdot r^2 \cdot \delta\phi + 2dr \cdot r \cdot \delta\phi^2 + r^2 \cdot \delta\phi^2, \quad (30)$$

$$dA_s = (r + \frac{1}{2}dr) \cdot (\delta\phi + \frac{1}{2}d\delta\phi) \cdot dz = dz \cdot r \cdot \delta\phi, \quad (31)$$

$$dV = (r + \frac{1}{2}dr)^2 \cdot (\delta\phi + \frac{1}{2}d\delta\phi)^2 \cdot dz = dz \cdot r^2 \cdot d\delta\phi^2. \quad (32)$$

The equation is developed the tension force in the geosynthetic:

$$\frac{d^2z}{dx^2} = \frac{q_2}{H} + \frac{C-x}{H}, \quad (33)$$

$$H = \frac{2 \cdot \int_0^i \sqrt{1+(z_w^1)^2} \cdot dx + 2 \cdot \int_i^j \sqrt{1+(z_p^1)^2} \cdot dx - l_0}{2 \cdot \int_0^i (1+(z_w^1)^2) \cdot dx + 2 \cdot \int_i^j (1+(z_p^1)^2) \cdot dx}. \quad (34)$$

Where

$$z_W(x) = A_{1,W} \cdot e^{\alpha_W \cdot x} + A_{2,W} \cdot e^{-\alpha_W \cdot x} - \frac{\beta_W}{\alpha_W^2}, \quad 0 \leq x \leq i, \tag{35}$$

$$z'_W(x) = \alpha_W \cdot (A_{1,W} \cdot e^{\alpha_W \cdot x} - A_{2,W} \cdot e^{-\alpha_W \cdot x}).$$

The tensile force per meter geosynthetic:

$$S(x) = \varepsilon(x) / J = H \cdot \sqrt{1 + z'^2(x)}. \tag{36}$$

3.2. Result of model

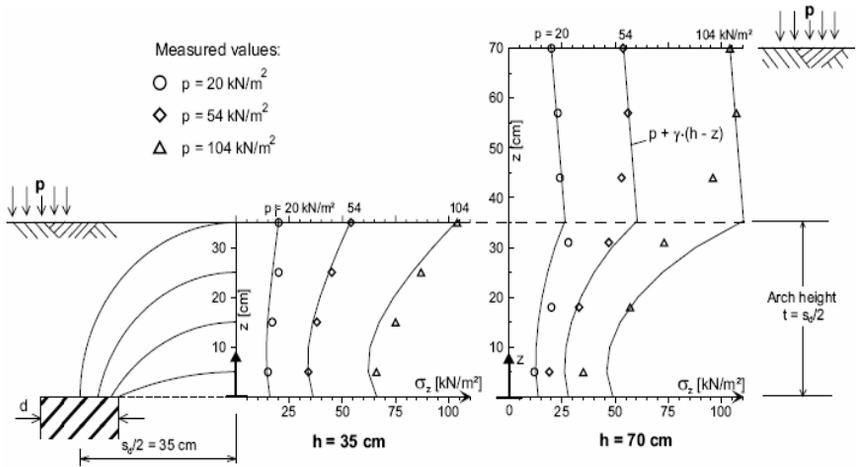


Fig. 12. The result of model Zaeske (2001) [2]

According to the experiment by Zaeske (2001), it is proven that the ratio of the arching in soil with the real dimension is 1/3. This includes 4 piles in soft soil. On the top of each pile is covered by geotextile with the earth pressure cells.

The experiment result is recorded as below:

Case 1: distance between 2 piles $s = 70\text{cm}$, sand layer's thickness of 35cm, applied loads of 20kN/m², 5420kN/m², 10420kN/m². Vertical stress is measured at distance of 5cm, 15cm, 25cm between and above the top of 2 piles.

Table 2

Case 1

p (kPa)	σ (kN/m ²)	h (cm)
20	15-16-19	5-15-25
54	33-42-45	5-15-25
104	65-75-87	5-15-25

Case 2: distance between 2 piles $s = 70\text{cm}$. sand layer's thickness of 70cm, applied loads of 20 kPa, 54 kPa, 104 kPa. Vertical stress is measured at distance of 5cm, 20cm, 30cm, 45cm, 55cm between and above the top of 2 piles.

Table 3

Case 2

p (kPa)	σ (kN/m ²)	h (cm)
20	15-20-29-25-22	5-20-30-45-55
54	20-33-46-54-57	5-20-30-45-55
104	35-57-73-95-107	5-20-30-45-55

4. Design of ingenieurgesellschaft geotecgnik walz (igw) used for Hung Loi metro in Can Tho City

The model uses cylindrical piles with diameter $D = 300\text{mm}$, spacing between piles $S=4000\text{mm}$, reinforced concrete dimension of $1500 \times 1500 \times 300\text{mm}$, above is geotextile with the height of 500mm for big sand particles. Concrete layer $10 \times 20 \text{ B.15}$ thickness of 250mm , rock layer $0 \times 40\text{mm}$ thickness of 350mm .

The model is illustrated in Fig.13.

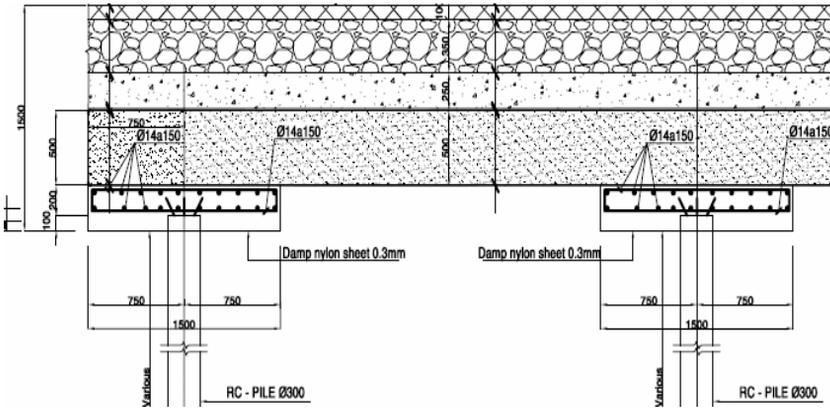


Fig. 13. Design of (IGW) used for Hung Loi Metro in Can Tho City

Deformation of the structure after completion of project in Fig. 14.

LGA Bautechnik GmbH
Member of LGA – a group of companies

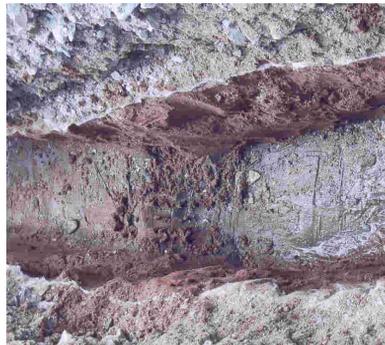


Fig. 14. Differential settlement of Hung Loi Metro project

5. The development of the new model

Redesign the model using reinforced concrete piles with B.20, cross section area of 300x300mm, spacing between piles varies from 1.0m, 1.5m, 2.0m, 2.5m, using Mac 40 geotextile to put on the top of each pile. Sand layer is 1m high, reinforced concrete thickness of 150mm. Using Plaxis 3D Tunnel and Mohr-Coulomb to model with the following parameters.

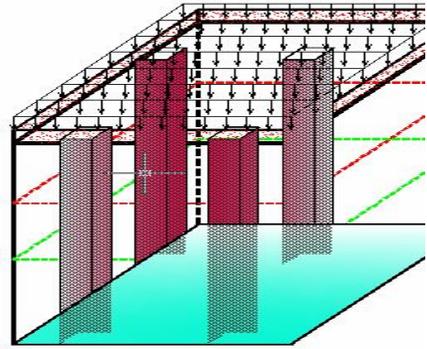


Fig. 15. The development of the new model to repair Hung Loi Metro in Can Tho city

Table 4

Properties of soil layers

Properties	Index	Layer 1	Layer 2	Layer 3	Sand layer	Unit
		Soft soil	stiff clay	sand	Sand embankment	
Horizontal coefficient ratio	k_x	$0.214 \cdot 10^{-6}$	$1.2 \cdot 10^{-4}$	$2 \cdot 10^{-2}$	$3 \cdot 10^{-2}$	cm/s
Vertical coefficient ratio	k_y	$0.12 \cdot 10^{-6}$	$0.6 \cdot 10^{-4}$	$1 \cdot 10^{-2}$	$1 \cdot 10^{-2}$	cm/s
Modulus of elasticity of the unstabilized soil surrounding	E_{oed}	1252	14900	28860	30000	kN/m ²
Poisson ratio	ν	0.35	0.33	0.3	0.3	-
Cohesion	C'	8	71	1	1	kN/m ²
Angle of friction of soil	φ'	$18^{\circ}16'$	$26^{\circ}58'$	30°	30°	degree

Table 5

Properties of reinforced concrete pile

Properties	Index		Unit
Modulus of elasticity reinforced concrete	E	$2.9 \cdot 10^7$	kN/m ²
Area of section	A	$0.3 \cdot 0.3$	m ²
Poision ratio	ν	0.15	-
Base thickness	h	0.15	m

5.1. The analysis of model used Plaxis 3d Tunnel software

5.1.1. Pile subsidence

To create the spherical dome, there should not be any subsidence on the pipes, the limit subsidence is $S \leq 10\text{mm}$

5.1.2. The effect of geotextile

Geotextile with high expansion, there should not be any damage on geotextile under load.

5.1.3. Sand layer

Sand particles are big with $c' = 1\text{kN/m}^2$, $\varphi' = 30$ degrees, the height of sand layer should be corresponding to the distance between piles.

5.1.4. Reinforced concrete layer

There needs to be reinforced concrete layer for the load distribution to avoid stress concentration on critical points.

5.2. The analysis result of the model

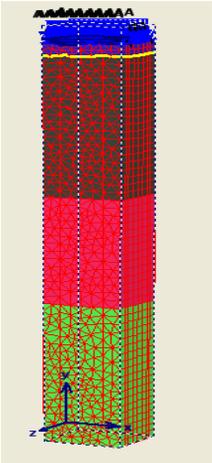


Fig. 16. Model in Plaxis

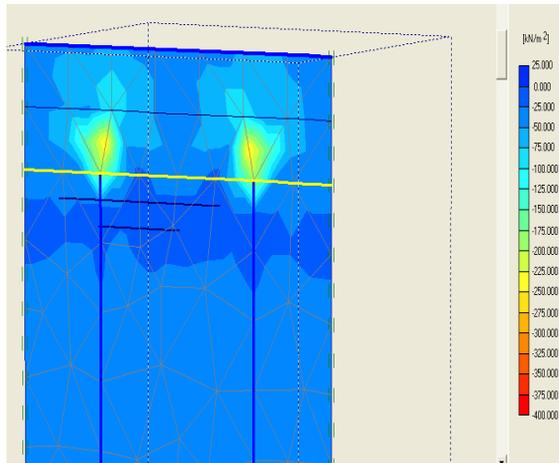


Fig. 17. The vertical stress on top of the top pile

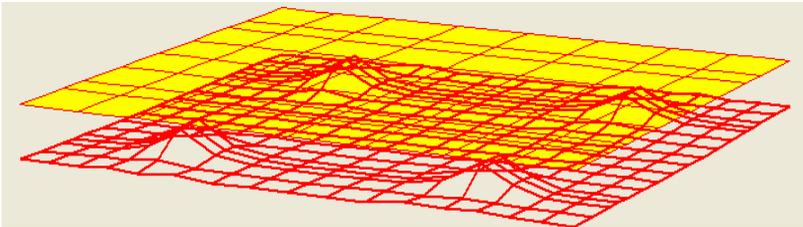


Fig. 18. The tensile force per meter geosynthetic

5.2.1. Stress Distribution

Below are the graphs of the relationship between stress distribution and the pile spacing.

With the pile spacing $S = 1\text{m}$ and $S = 1.5\text{m}$, the vertical stress value at the top of the pile is maximum, in the higher up than the top of the pile, the vertical stress tends to decrease and distributed equally near the armoured concrete slab.

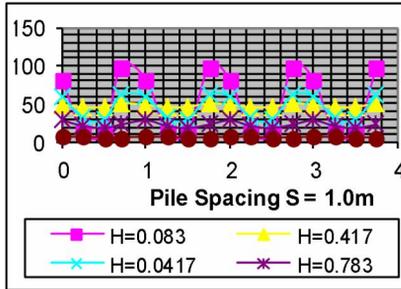


Fig. 19. The vertical stress on top of the top pile with $S = 1.0\text{m}$

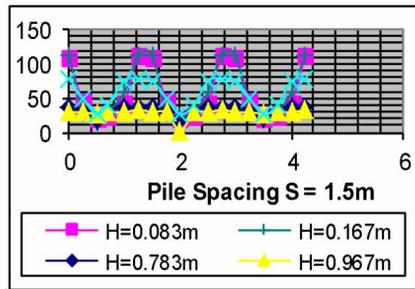


Fig. 20. The vertical stress on top of the top pile with $S = 1.5\text{m}$

When the pile spacing is farther $S = 2,0\text{m}$ and $S = 2,5\text{m}$, the maximum vertical stress value at the top of the pile is 1.5 times higher than the pile spacing $S = 2.0\text{m}$ and $S = 2.5\text{m}$, in the higher up than the pile head, the vertical stress tends to decrease but not distributed equally near the armoured concrete slab.

5.2.2. The vertical stress on top of the top pile ratio

The vertical stress on top of the top pile ratio $n = \sigma_c / \sigma_s$,

- Spacing between piles and high embankment $S=1\text{m}$, $H = 1\text{m}$

When $S = 1\text{m}$, $H = 1\text{m}$. The stress concentration factor at the top of the pile is $n = 6.8$, in the higher up than the pile head, the vertical stress tends to decrease and distributed equally near the armoured concrete slab. The stress concentration factor $n=1.12$.

- Spacing between piles and spacing between pile $S=1.5\text{m}$, $H=1\text{m}$.

When $S = 1.5\text{m}$, $H = 1\text{m}$. The stress concentration factor at the top of the pile is decreased $n = 4.93$, in the higher up than the pile head, the

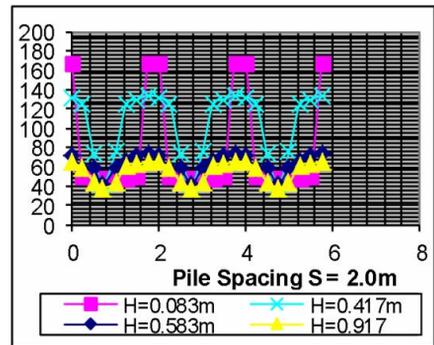


Fig. 21. The vertical stress on top of the top pile with $S = 2.0\text{m}$

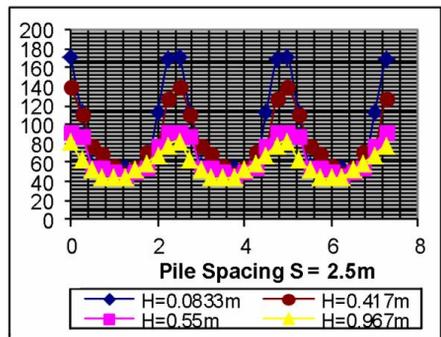


Fig. 22. The vertical stress on top of the top pile with $S = 2.5\text{m}$

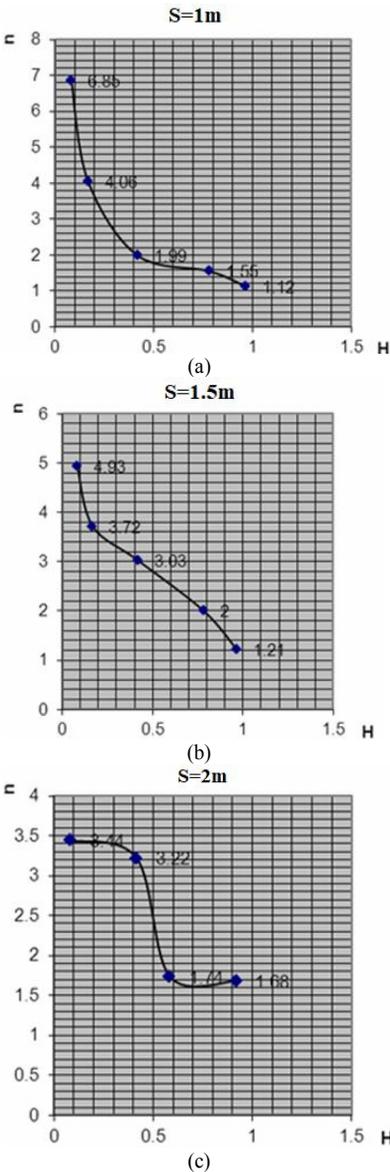


Fig. 23. Relation between the vertical stress on top of the top pile ratio and height embankment with spacing between piles is 1m (a), 1.5m (b), 2.0m (c)

vertical stress tends to decrease and distributed equally near the armoured concrete slab. The stress concentration factor $n=1.12$.

- Spacing between piles and spacing between pile $S=2\text{m}$, $H=1\text{m}$.

When $S = 2\text{m}$, $H = 1\text{m}$. The stress concentration factor at the top of the pile is decreased $n = 3.44$, in the higher up than the pile head, the vertical stress tends to decrease and not distributed equally near the armoured concrete slab. The stress concentration factor $n=1.68$.

6. Conclusion and recommendation

6.1. Conclusion

- The coefficient of stress concentration n or the inverse n^* will depend on the distance between piles. The further the distance is, the more n decreases and the more n^* increases.

- The height $h_{\text{dap}} \geq S$ will make the spherical dome become clearer. When $h_{\text{dap}} \geq S/2$ then $hg=S/2$. When $h_{\text{dap}} < S/2$ then arching height $hg= h_{\text{dap}}$.

- When the height cao $h_{\text{dap}} < S/2$ the deformation is not uniform, and the other way around. When choosing the sand layer, we should choose $h_{\text{dap}} > S/2$ and depend on the distance between the piles.

6.2. Recommendation

- Structure of the project is not reasonable. We should choose Structure of the project bearing capacity distribution.

- When applying the new model, notice that the distance between piles and the height should be carefully considered to improve and increase the efficiency of the arching..

REFERENCES

1. *B. Le Hello, B. Chevalier, G. Combe, P. Villard*, Coupling finite elements and discrete elements methods, application to reinforced embankment by piles and geosynthetics.
2. *Chau Ngoc An*, Foundation, Publishers National University Ho Chi Minh City, (2012).
3. *Nguyen Minh Tam*, The behavior of DMC column under highway embankments by finite element analysis, (2006).
4. *H.-G. Kempfert*, Lateral spreading in basal reinforced embankments supported by pile-like elements, University Kassel, Germany March 2008.
5. *Hans-Georg Kempfert Berhane Gebreselassie*, Excavations and Foundations in Soft Soils, University Kassel, Germany.
6. *H.-G. Kempfert & M. Raitzel & A. Kirchner*, Pile-supported embankments on soft ground for a high speed railway - Load Transfer, Distribution and Concentration by different construction methods
7. *Kempfert, H. - G, Stadel, M. and Zaeske, D.* Design of geosynthetic-reinforced bearing layers over piles. Bautechnik, Vol. 74, No. 12, December 1997
8. *BS 8006 (1995)*: British Standard, code of practice of strengthened/ reinforced soils and other fills, chapter 9
9. *Pham Quang Long*, Existing problems of Vietnamese design standards for highway embankment on soft ground
10. *Nguyen Minh Tam*, The behavior of DCM (Deep cement mixing) columns under highway embankments by finite element analysis, august 2006
11. *Terzaghi, K. (1943)*, Theoretical Soil Mechanics, Jonh Wily anh Sons, New York
12. *Hans-Georg Kempfert Berhane Gebreselassie*, Excavations and Foundations in Soft Soils, University Kassel, Germany
13. *H.-G. Kempfert & M. Raitzel & A. Kirchner*, Pile-supported embankments on soft ground for a high speed railway - Load Transfer, Distribution and Concentration by different construction methods
14. *Hewlett, W. J., and Randolph, M.F.* Analysis of piled embankments. Ground Engineering, Vol. 22, No. 3, April 1988.

Стаття надійшла 03.07.2019

Nguyen Anh Tuan, Nguyen Tuan Phuong

EVALUATION ON STRESS DISTRIBUTION, DEFORMATION RATE IN EMBANKMENT AND SOFT SOIL REINFORCED CONCRETE PILE COMBINED GEOTEXTILE BELOW THE EMBANKMENTS IN GEOLOGICAL CONDITIONS MEKONG DELTA

With the rapid growth of the economy and the trend of industrialization and modernization of the country, the demand of developing buildings, factories and other infrastructures in Vietnam increases, especially in the Mekong Delta area. Because of the geological structure property of Mekong Delta is mainly soft soil, the foundation depth can vary from 30 to 40m. To meet the demand of infrastructure development, there some studies and researches done recently on this geological structure.

The evaluation and analysis on stress distribution, ground deformation and reinforced concrete and geotextile treatment on soft soil is extremely essential to find the new solution to improve the quality of foundation in Mekong Delta area. The main content of the paper is evaluation stress distribution, deformation rate in embankment and soft soil reinforced concrete pile combined geotextile below the embankments in geological conditions in Mekong delta by finite element method to Geotechnique-designer have to notice the correlation of rational pile-distance and embankment-depth when design weak foundation.

Keywords: Geosynthetic reinforced pile, soft soil, pile embankment, foundation, FEM.

Nguyen Anh Tuan, Nguyen Tuan Phuong

ОЦЕНКА РАСПРЕДЕЛЕНИЯ НАПРЯЖЕНИЙ, СКОРОСТИ ДЕФОРМАЦИИ НА НАСЫПИ И ГЕОТЕКСТИЛЕ КОМБИНИРОВАННОГО БЕТОНА ИЗ МЯГКОГО ГРУНТА В ГЕОЛОГИЧЕСКИХ УСЛОВИЯХ ДЕЛЬТЫ РЕКИ МЕКОНГ

С быстрым ростом экономики и тенденцией к индустриализации и модернизации страны, спрос на строительство зданий, фабрик и других видов инфраструктур во Вьетнаме увеличивается, особенно в области дельты Меконга. Из-за особенностей геологической структуры в дельте реки Меконга преобладают мягкие грунты. Глубина заложения фундаментов сооружений может варьироваться от 30 до 40 метров. Чтобы удовлетворить потребность в развитии инфраструктуры, недавно были проведены некоторые исследования этой геологической структуры.

Были выполнены оценка и анализ распределения напряжений, деформации грунта, железобетонных конструкций и геоткани в мягком грунте. Такая оценка чрезвычайно важна для поиска новых подходов, направленных на улучшение характеристик фундаментов сооружений в районе дельты реки Меконг. Основным методом исследования является метод конечных элементов.

Ключевые слова: армированный геосинтетический материал, мягкий грунт, насыпной грунт, фундамент, метод конечных элементов.

УДК 539.3

Nguyen Anh Tuan, Nguyen Tuan Phuong. Оцінка розподілу напружень, швидкості деформації насипу при спорудженні комбінованих з геотканиною пальових фундаментів в геологічних умовах слабких ґрунтів дельти річки Меконг // Опір матеріалів і теорія споруд: наук.-тех. збірн. – К.: КНУБА, 2019. – Вип. 103. – С. 17-32. Іл. 23. Бібліогр. 14 назв.

UDC 539.3

Nguyen Anh Tuan, Nguyen Tuan Phuong. Evaluation on stress distribution, deformation rate in embankment and soft soil reinforced concrete pile combined geotextile below the embankments in geological conditions Mekong delta// Strength of Materials and Theory of Structures: Scientific-and-technical collected articles. – K.: KNUBA, 2019. – Issue 103. – P. 17-32. Fig. 23. Ref. 14.

Автор (вчена ступень, вчене звання, посада): *PhD, Lecturer, Faculty of Transportation Engineering, Hochiminh City University of Transport, Nguyen Anh Tuan*

Адреса: *No. 2, D3 St., Ward 25, Binh Thanh Dist., Hochiminh City, Vietnam.*

Тел.: *(+84) 917.863.898.*

Імейл: tuankct@hcmutrans.edu.vn

Автор (вчена ступень, вчене звання, посада): *PhD, Lecturer, Faculty of Civil Engineering, Hochiminh City University of Technology, Nguyen Tuan Phuong*

Адреса: *No. 268, Ly Thuong Kiet St., Dist. 10, Hochiminh City, Vietnam.*

Тел.: *(+84) 919.070.096.*

Імейл: tuanphuongvk@gmail.com